CHEMICAL ENGINEERING TRANSACTIONS
VOL. 69, 2018
A publication of AIDIC
The Italian Association of Chemical Engineering
Online at www.aidic.it/cet
Guest Editors: Elisabetta Brunazzi, Eva Sorensen

ISBN 978-88-95608-66-2; **ISSN** 2283-9216

Simulation of an SO_2 Tolerant Amine Based Post-combustion CO_2 Capture Process

Ashleigh Cousins[a,*], Graeme Puxty[b], Pauline Pearson[c], Ralph Weiland[d], Bharti Garg[e], Kangkang Li[b], Vince Verheyen[e], Paul Feron[b]

[a]CSIRO Energy, Pullenvale, Brisbane, QLD, Australia
[b]CSIRO Energy, Newcastle, NSW, Australia
[c]CSIRO Energy, Clayton, Melbourne, VIC, Australia
[d]Optimised Gas Treating, Texas, USA
[e]Federation University Australia, Churchill, VIC 3842, Australia
ashleigh.cousins@csiro.au

Removal of multiple contaminants from flue gas streams in a single process step offers the potential to lower the cost of emissions reduction technologies. An example is the CS-Cap process, developed by CSIRO, which removes both the SO_2 and CO_2 from combustion flue gases. In order to further develop this process, a rate based simulation is required of not only the CO_2 capture section, but also the absorption of SO_2 into aqueous amine absorbents. ProTreat® simulation software was used to simulate CSIRO's Loy Yang CO_2 capture pilot plant. This pilot plant has previously been used for proof-of-concept operation of the CS-Cap process. The model simulates various scenarios and flue gas conditions to determine the effect on the operating requirements of the SO_2 capture stage. It reveals that the recirculating absorbent flow rates required in the SO_2 capture loop are of similar magnitude to those required in the CO_2 capture stage. Manipulating the operating parameters of the SO_2 capture section will affect the properties, particularly sulfate concentration, of the slip stream sent for disposal/treatment. This could potentially allow the properties of the waste stream to be tailored for the particular downstream treatment used. In addition, condensation of water from the inlet flue gas stream is identified as an issue requiring further investigation.

1. Introduction

In order to meet the Paris agreement to limit global warming to well below 2 ^oC above pre-industrial levels, Carbon Capture and Storage (CCS) technologies will be required (IEA 2017). There are a number of technologies available for capturing CO_2 (and other greenhouse gas) emissions from industry and power generation. The most technologically advanced of these processes is post combustion capture (PCC) of the CO_2 in an absorption/desorption process using alkanolamines. One of the major challenges facing implementation of PCC technologies, is the high cost (particularly capital) and energy penalty imposed on the host power station (Cormos et al. 2013).

A potentially lower cost method for removing CO_2 emissions from the power sector is the concept of combined capture, i.e. removing 2 or more components from the flue gas stream in a single process step. When amine absorbent based PCC is applied to coal-fired power stations, one of the challenges is the requirement to remove other acid gases, such as SO_2, from the flue gas prior to the CO_2 capture unit. The absorbed SO_2 forms a stronger acid than CO_2, and is not regenerated at the conditions typically employed for CO_2 stripping. If not removed from solution, absorbed SO_2 will build up in the absorbent, lowering its ability to capture CO_2. As a result, most amine based CO_2 capture systems require upstream removal of SO_2 to low levels (typically < 10 ppm). In installations where Flue Gas Desulphurisation (FGD) is currently practiced, this might be achieved by simply adding an additional spray bank to the existing unit. In countries such as Australia, where FGD is not currently employed, adding CO_2 capture also requires the addition of an expensive FGD unit.

Combining the removal of CO_2 and SO_2 from the flue gas stream into a single process unit could provide significant economic savings, particularly for installations that do not currently utilise FGD. Combined CO_2 and

SO_2 capture has been proposed by a few researchers. TNO, in collaboration with CSIRO, have developed the CASPER process, which uses an amino acid absorbent to capture both the CO_2 and SO_2 from a flue gas stream (Misiak et al. 2013). CO_2 is removed from the absorbent via thermal stripping, whilst absorbed sulfur is oxidised to sulfate, and removed via precipitation. This process has been evaluated at pilot-scale, with results feeding into an economic assessment that showed the combined capture process had the potential to lower the cost of CO_2 avoided by 10-20% compared to a standard CO_2 capture process (employing 30 wt% monoethanolamine, MEA) with FGD (Cousins et al. 2014). Another combined capture concept is the Shell-Cansolv process, currently operating at Saskpower's Boundary Dam power station (IEAGHG 2015). In this process an aqueous amine absorbent is used to remove SO_2 in an initial packed column segment. CO_2 is then removed via a second amine absorbent in a subsequent column stage. Both the SO_2 and CO_2 are removed from the absorbent via separate thermal strippers, generating H_2SO_4 and high purity CO_2 for enhanced oil recovery (EOR).

The CSIRO have developed the CS-Cap process as an alternative low cost multi-component removal process (Meuleman et al. 2012). Here, a single amine absorbent is used to capture both the SO_2 and CO_2 from the flue gas stream, in separate contact stages (Pearson et al. 2017). The development of the process came from early work completed by Beyad et al. (2014) which showed that under controlled laboratory conditions, no SO_2-amine ('sulfurous acid amide') carbamate equivalent was observed at absorber or desorber temperatures. Further work (Puxty et al. 2014) identified that SO_2 in the flue gas would still readily absorb into CO_2 loaded amine solutions. Proof-of-concept of this process was achieved by utilising a CO_2 rich amine absorbent to capture SO_2 from the flue gas at a brown coal-fired power station. The CO_2 rich amine absorbent readily absorbed SO_2 from the flue gas until it became saturated. At that point the pH of the solution was noted to drop rapidly, and break-through of SO_2 into the flue gas exiting the column was observed (Pearson et al. 2017).

To further develop the CS-Cap process it is important to complete a rate-based simulation so that the effect of operating parameters on the effectiveness of the process can be explored. Additionally, coal fired power station flue gases can contain significant water content. Where upstream treatment (e.g. FGD) is not used, the temperature of the flue gas into the SO_2/CO_2 capture process could be high. If this is the case, then cooling of the flue gas within the capture process, and condensation of its water content, may occur. It is also important to understand how this dilution could affect the sulfur-rich stream destined for reclamation. ProTreat® is capable of simulating the absorption of both CO_2 and SO_2 into aqueous amines as rate based processes. A model of the SO_2 absorption section of the CS-Cap process has been built in ProTreat®. This model was then used to explore: (1) the influence of inlet flue gas properties, namely SO_2 concentration, on the operating requirements of the SO_2 capture loop, and; (2) the effect of condensed water from flue gas cooling on the process.

2. Experimental

2.1 ProTreat model

The model of the SO_2 capture loop was built using ProTreat® V6.4. ProTreat® has previously been found to adequately replicate a pilot-scale MEA based CO_2 capture process (Cousins et al. 2012). A sensitivity analysis was performed to determine the effect of increasing column stage calculations on results. Increased stages give greater accuracy, but at increased processing time. 100 stages was determined to be a suitable compromise, bearing in mind that the results presented here are meant to provide insight into operating conditions, and not detailed design. The ProTreat® flow diagram of the model is provided in Figure 1. Flue gas enters the SO_2 absorption column through line 1, and exits via line 2. CO_2 rich absorbent from the CO_2 capture section enters through line 14 (27.1 wt% MEA, 0.5 molCO_2/molMEA). Previous pilot-scale operation has shown that SO_2 absorbed into amine absorbents under the high O_2 environment found in flue gas based CO_2 capture conditions is rapidly oxidised to sulfate (Reynolds et al. 2012, IEAGHG 2012). As such a component splitter was added to remove 95% of the SO_2 from solution, replacing it with sulfate through Inlet-3. A flow multiplier was used to match the inlet sulfate molar flow rate to the exiting SO_2 molar flow rate. Line 5 (Outlet-2) is the excess stream, which will be sent for reclamation (S removal).

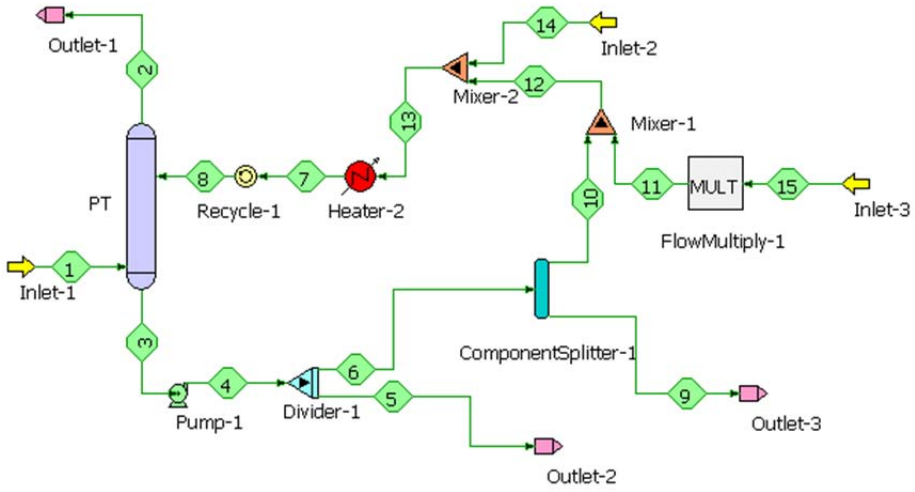

Figure 1: ProTreat model of the CS-Cap process SO_2 capture loop

2.2 Effect of flue gas SO_2 concentration and CO_2 rich absorbent inlet stream

To investigate the effect of the CO_2 rich absorbent inlet stream, different flowrates were added to the system through stream 14 (Inlet-2). The effect of flue gas SO_2 concentration was also observed by simulating flue gas with two different SO_2 concentrations: 200 ppmV (a 'typical' SO_2 concentration as observed at the Loy Yang CO_2 capture pilot plant) and 600 ppmV (a 'maximum' SO_2 concentration observed at the pilot plant). For the base case simulations, the temperature of the recirculating absorbent in the SO_2 capture loop was altered to ensure no gain or loss of water from the system.

2.3 Effect of flue gas condensation

As flue gas from coal-fired power stations can be saturated, it is possible for condensation of water to occur, particularly for brown coal or lignite flue gases. Hence the simulations were repeated with the inlet flue gas temperature increased to 60 ^{o}C, and the recirculating absorbent temperature fixed at 40 ^{o}C. The flue gas stream was fully saturated for both cases. The effect of water condensing out of the flue gas into the SO_2 capture loop was then observed for flue gas containing 200 ppmV SO_2.

The total standard flue gas volume flow (and hence SO_2 molar flow) entering the plant was held constant. As such, a slightly lower mass flow entered the SO_2 capture loop for the 60 ^{o}C scenario. The dry gas composition was also held constant. However, due to the higher water content of the 60 ^{o}C case, the total concentration of the other components decreased (see Table 1).

2.4 Description of Loy Yang CO_2 capture pilot plant

Proof-of-concept operation of the CS-Cap process was completed at CSIRO's CO_2 capture pilot plant at the AGL Loy Yang power station (Pearson et al. 2017). As such, the details of this pilot plant were entered into the model for the simulations. This pilot plant has been described in detail previously (Artanto et al. 2012). In the proof-of-concept experiments, the caustic solution in the pre-treatment column was replaced by a CO_2 rich MEA solution. This solution was operated in batch-mode, recirculating in the pre-treatment system until break-through of SO_2 into the flue gas leaving the pre-treatment column was observed. These experiments highlighted the ability of CO_2 rich MEA to quickly remove SO_2 from the inlet flue gas. This also provided a sulfur-rich absorbent solution that has been used in subsequent reclamation experiments.

The pre-treatment column of the Loy Yang pilot plant is 314 mm in diameter and contains 1 m of 5/8" Pall ring packing material made from 304 grade stainless steel. Flue gas from the power station was cooled in an upstream cooler to minimise condensation of water in the pre-treatment system. Flue gas inlet conditions used in the simulations are provided in Table 1. The N_2 concentration was adjusted to account for the 2 different SO_2 concentrations evaluated.

Table 1: Flue gas properties

	Unit	Case		
		Base Case	High inlet SO_2 concentration	High inlet temperature
Temperature	^oC	40	40	60
Pressure	kPa-a	103	103	103
Flow rate	m^3/h	100	100	106.3
Flow rate	kg/h	116.8	116.9	110.8
Concentration				
H_2O	mol%	7.24	7.24	19.51
CO_2	mol%	12.06	12.06	10.46
SO_2	mol%	0.02	0.06	0.02
N_2	mol%	74.19	74.15	64.38
O_2	mol%	6.49	6.49	5.63

3. Results

3.1 Effect of flue gas SO_2 concentration and CO_2 rich absorbent inlet stream

When operating with 30 wt% MEA, lean absorbent flow rates between 4 - 10 L/min are standard for the CO_2 capture loop of the Loy Yang pilot plant. For this simulation, a lean absorbent flow rate of 5 L/min was assumed in the CO_2 capture loop, with split streams between 0.5 to 10% diverted to the SO_2 capture loop. The recirculation flow rate in the SO_2 capture loop was then altered until a SO_2 concentration of 10 ppmV in the flue gas leaving the SO_2 capture section was achieved. Figure 2 shows the effect of varying the CO_2 rich absorbent slip stream flow rate on the recirculation flow rate required, and pH and wt% sulfate achieved in the SO_2 rich stream sent for reclamation.

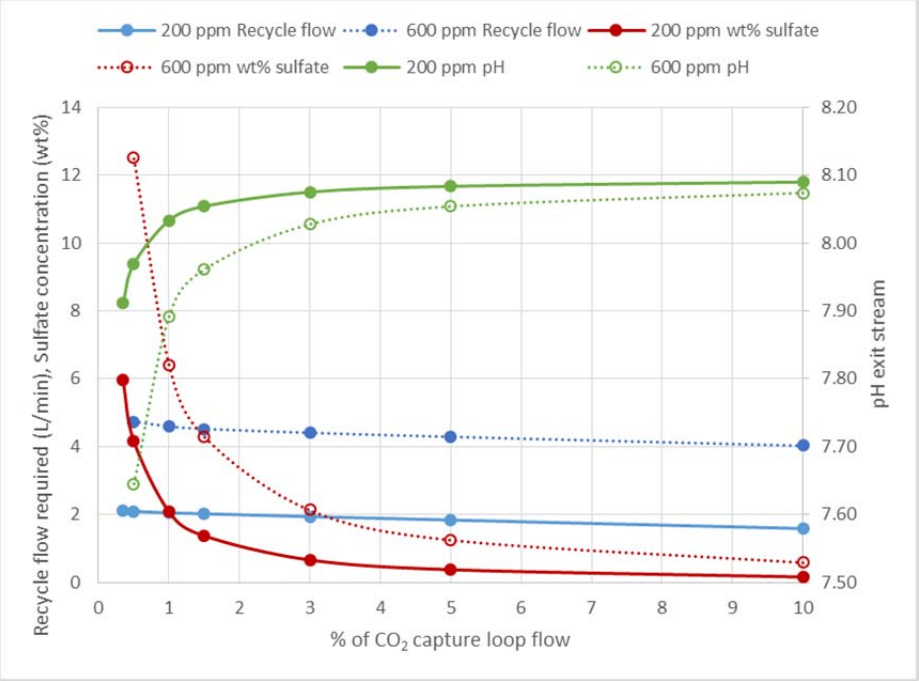

Figure 2: Effect of CO_2 rich inlet flow on SO_2 loop recirculation flow rate, pH, and wt% sulfate of SO_2 rich stream sent for reclamation. Simulations completed for inlet flue gas SO_2 concentrations of 200 and 600 ppmV

As can be seen in Figure 2, a smaller flow rate of CO_2 rich absorbent entering the SO_2 capture loop results in an increase in recirculation flow rate and wt% sulfate, and a drop in pH. A higher flow rate, wt% sulfate and drop in pH are also observed as the concentration of SO_2 in the inlet flue gas increases. As breakthrough was not obtained here, full saturation was not achieved nor the low pH conditions observed during the pilot plant trials completed at AGL Loy Yang (sulfate concentration up to 11.5 wt%, pH drop to ~4, see Pearson et al. 2017). The simulations also show how the slip stream of CO_2 rich absorbent affects the concentration of

sulfate in the absorbent sent for reclamation (note, the temperature of the re-circulating absorbent was altered here to ensure no gain or loss of water in the SO_2 capture column). The final operating conditions of the CS-Cap process will be a trade-off between increased corrosion from lower pH, larger equipment to deal with higher re-circulating absorbent, and increased concentration of sulfate in the absorbent stream to be treated. The recirculating absorbent flow rate is of comparable magnitude to the flow rate in the CO_2 capture loop (1.6 – 4.7 L/min in the SO_2 loop compared to 4 – 10 L/min in the CO_2 capture loop). As the SO_2 capture section will likely have a similar diameter column to the CO_2 capture section (as treating similar volume of flue gas), it is likely similar absorbent flow rates will be required to achieve complete wetting of the packing and stable plant operation. This may be the final determinant in acceptable recirculation flow in the SO_2 capture section.

3.2 Effect of flue gas condensation

When CO_2 capture is applied to a coal flue gas, significant volumes of water can be generated as a result of flue gas cooling. If an upstream cooling unit is not provided, then it is possible for condensation to occur within the SO_2 capture loop of the CS-Cap process. This was explored here by increasing the flue gas inlet temperature to 60 ^oC (fully saturated), and holding the recirculating absorbent temperature constant at 40 ^oC. These results are provided in Figure 3. A constant standard volumetric flow was maintained between the different simulations. This resulted in a slightly lower total mass flow rate entering the system for the 60 ^oC case due to the higher concentration of water (see Table 1). The SO_2 molar flow rate entering the facility was the same for all cases.

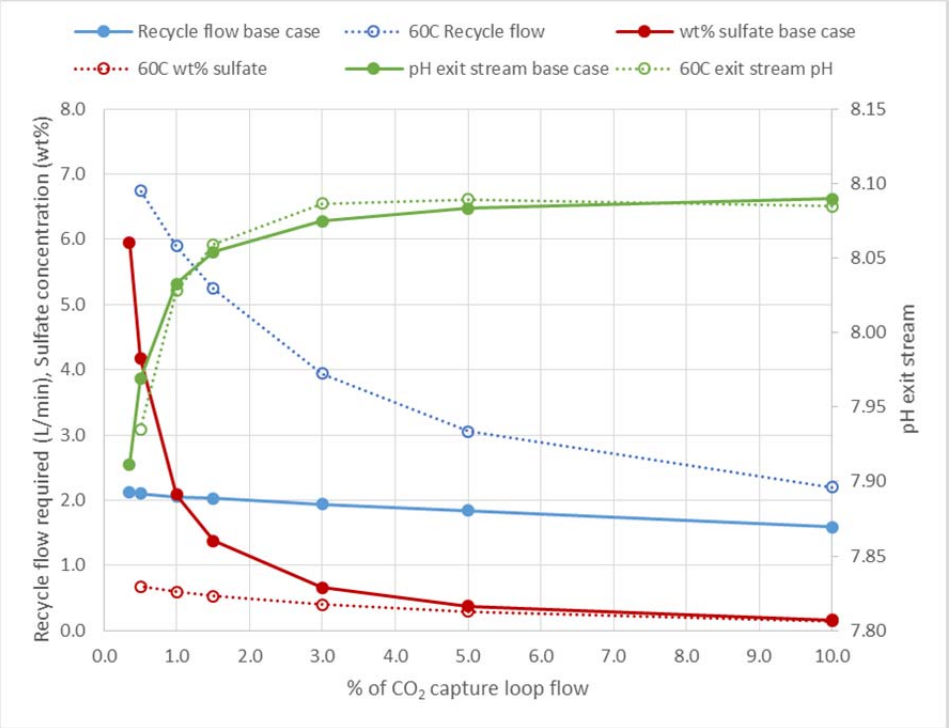

Figure 3: Effect of flue gas inlet temperature (40 and 60 ^oC) on SO_2 capture loop of the CS-Cap process. Simulations completed with inlet flue gas SO_2 concentration of 200 ppmV

As can be seen in Figure 3, cooling the flue gas in the SO_2 capture loop results in an increase in the recirculating flow rate required in the column. In addition, the water condensed out of the flue gas stream causes the drain stream (sent to reclamation) to increase, with the wt% sulfate decreased as a result of dilution. This could have a significant impact on the effectiveness of the reclamation methods employed. This simulation shows quite clearly the impact if flue gas cooling is not employed. Condensation of water from the flue gas can be quite substantial, particularly if the process is applied to a lignite power station. This could necessitate the addition of a large cooling unit upstream of the CS-Cap process, increasing overall capital costs. An economic evaluation is required to determine if CS-Cap combined with upstream cooling is still competitive compared to the standard PCC process coupled with FGD. Note, upstream cooling may still be required after FGD for the standard case (typical FGD exit temperature 60 ^oC, CO_2 absorption operating temperature typically 40 ^oC). Alternatively, the SO_2 capture loop could potentially be run at higher

temperatures, shifting the condensation of water to the CO_2 capture section. The excess water condensed from the flue gas could be removed in the CO_2 stripping column. This would add an energy penalty to the CO_2 capture process, but could be beneficial if an additional water source is advantageous. At the Boundary Dam CO_2 capture plant, an upstream cooler is used to condense water out of the flue gas prior to the SO_2 absorption column. The condensed water is sent to the water treatment plant and is used as make-up.

4. Conclusions

A rate-based simulation of SO_2 removal from a coal flue gas was built using the ProTreat® simulation software. This model was used to investigate the effect of operating conditions on the SO_2 capture loop of the CS-Cap process. The simulations highlighted the effect of flue gas SO_2 concentration, and CO_2 rich absorbent inlet flow rate on the operating conditions required to maintain the SO_2 concentration in the exiting flue gas below 10 ppmV. The recirculating flow rate required in the SO_2 absorption loop was of similar magnitude to the absorbent flow rate used in the CO_2 capture section of the pilot plant simulated. This bodes well for the process as similar diameter columns would likely be required in the SO_2 and CO_2 capture sections as a similar volume of flue gas will require treating. One issue that will need to be explored further is the potential for condensation of water from the inlet flue gas stream into the SO_2 capture loop. This condensation increases the recirculating flow rate in the column and dilutes the stream sent for reclamation. Any dilution will likely reduce the efficiency of the reclamation process used.

Acknowledgments

The authors wish to acknowledge financial assistance provided by Brown Coal Innovation Australia Limited, a private member-based company with funding contracts through Australian National Low Emissions Coal Research and Development Ltd (ANLEC R&D) and the Victorian State Government.

References

Artanto, Y., Jansen, J., Pearson, P., Do, T., Cottrell, A., Meuleman, E., Feron, P., 2012, Performance of MEA and amine-blends in the CSIRO PCC pilot plant at Loy Yang Power in Australia, Fuel, 101, 264-275

Beyad, Y., Puxty, G., Wei, S., Yang, N., Maeder, M., Burns, R., Meuleman, E., Feron, P., 2014, An SO_2 tolerant process for CO_2 capture, International Journal of Greenhouse Gas Control, 31, 205-213

Cormos, C.C., Cormos, A.M., Agachi, P.S., Assessment of carbon capture options for super-critical coal-based power plants, Chemical Engineering Transactions, 35, 367-372

Cousins, A., Artanto, Y., Meuleman, E., Pearson, P., Puxty, G., Jansen, J., Conway, W., Slater, N., Curtis, E, Monch, A., Feron, P., Verheyen, V., Misiak, K., Huizinga, A., Sanchez Sanchez, C., van Os, P., Goetheer, E., Castelow, P., 2014 Combined low-cost pre-treatment of flue gas and capture of CO_2 from brown coal-fired power stations, Proceedings Low Rank Coal 3rd International Industry Symposium

Cousins, A., Cottrell, A., Lawson, A., Haung, S., Feron, P., 2012, Model verification and evaluation of the rich-split process modification at an Australian-based post combustion CO_2 capture pilot plant, Greenhouse Gases Science and Technology, 2, 329-345

IEA, 2017, Energy Technology Perspectives, Paris, France

IEAGHG, 2012, Emissions of substances other than CO_2 from power plants with CCS, Cheltenham, UK

IEAGHG, 2015, Integrated carbon capture and storage project at Saskpower's Boundary Dam power station, 2015/06, August 2015, Cheltenham, UK

Meuleman, E., Puxty G., Feron, P., 2012, Process for capturing acid gases, Patent No. WO 2012097406

Misiak, K., Sanchez Sanchez, C., van Os, P., Goetheer, E., 2013, Next generation post-combustion capture: Combined CO_2 and SO_2 removal, Energy Procedia, 37, 1150-1159

Pearson, P., Moscatelli, J., Garg, B., Cousins, A., Meuleman, E., Puxty, G., Verheyen, V., Feron, P., 2017, An update on the development of the CSIRO's CS-Cap combined CO_2 and SO_2 capture process, Energy Procedia, 114, 1721-1728

Puxty, G., Wei, S., Feron, P., Meuleman, E., Beyad, Y., Burns, R., Maeder, M., 2014, A Novel process concept for the capture of CO_2 and SO_2 using a single solvent and column, Energy Procedia, 63, 703-714

Reynolds, A., Verheyen, T., Adeloju, S., Meuleman, E., Feron, P., 2012, Towards commercial scale post combustion capture of CO_2 with Monoethanolamine solvent: Key considerations for solvent management and environmental impacts, Environmental Science and Technology, 46, 3643-3654